




GL-3VFSIP

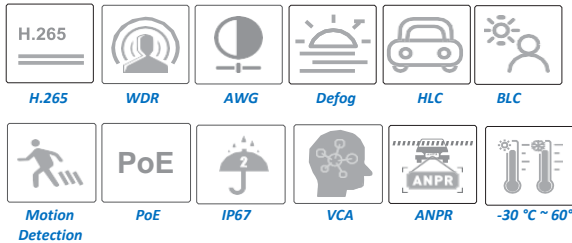

Specification:

4MP ANPR Bullet Network Camera

MODEL No.	GL-3VFSIP
CAMERA	
Image Sensor	1/2.8", Progressive Scan CMOS Sensor
Resolution	2592x1944 (4MP)
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC Iris
Accuracy	>90 %
Min. Illumination	0.5 lux@F1.4[colour,30IRE], AGC ON; 0 lux@F1.4, with IR On
Lens	6mm (3.6mm Optional)
Lens Type	Fixed focal
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
AUDIO & VIDEO	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Encoding Features	Main stream: 2592*1944,1-25(30)fps; 2304*1296,1-25(30)fps; 1920*1080, 1-25(30) fps Sub-stream: 480*640, 1-25(30) fps; 480 *360 1-25(30)fps; 352*288, 1-25(30)fps; 176*144, 1-25(30)fps MJPEG: 1920*1080, 1280*720, Close
Bit Rate	64 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
INTERFACES	
Network	RJ45
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output
FUNCTION	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
Intelligent Analytics	Video tampering detection, Vehicle Driving Direction, scene change detection, license plate recognition, Vehicle Color & Type Capture, No Licence Plate Detection
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE	Yes , IEEE802.3af
IR Distance	50 mtrs
Protection Grade	IP68, IK10
LPR	
Snapshot	Overview and cutout of plate for picture
White List	10000
Capture Speed Range	0~100km/h
Capture Type	Car/Truck/Bus etc..
Others	
Power Supply	DC12V/PoE
Power Consumption	< 7W
Operating Environment	-30 °C ~ 60°C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	279.5 × 100.3 × 88.9
Weight (net)	Approx. 1.04KG
Installation	Ceiling mounting; Wall mounting; Indoor; Outdoor

Key Features:

- Starlight H.265
- 5MP (2592x1944) @30fps
- Support smart H.265/H.264 coding
- ICR auto switch, true day/night
- Up to 50m IR night view distance;
- 3D DNR, true WDR, HLC, BLC and ROI coding
- 1CH alarm input; 1CH alarm output
- DC12V/PoE power supply
- Support three streams
- P2P function optional
- IP68, IK10
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics: video abnormality (video tampering, Vehicle Color & Type Recognition(scene change), license plate number with color & type recognition, no licence plate detection
- BIS, CE, ISO, FCC & ROHS Certified.
- Onvif Profile G, S, T Supported